

3/4 Extension Box Drawer Slide S-203

Features

- Ball bearing movement
- Positive stop for fully extended drawers
- Release allows easy drawer Interchange
- Minimum deflection
- Hold-in catch prevents bounce back
- Cushioned cabinet bumper mounted on cabinet channel to provide smooth and silent operation at both ends of movement

Mounting

- Side mounting with holes for #8 pan head screws (32mm Metric cabinet mounting system).

Space Required

- 1/2"(13mm) side clearance + 1/32" -0 each side of drawer.

Height Required

- 1-13/32"(36mm) overall height.

BIFMA Load Rating (per pair)


- 75 lbs.(34kg) based on 18" (457mm) size in normal usage.

Material and finish

- Inner channels
- 0.048"(1.55mm) thick precision strip cold rolled steel #2 temper(RC'B' 65-80). Outer channels
- 0.048"(1.12mm) thick precision strip cold rolled steel, #2 temper (RC'B' 65-80)
- hardened steel precision ball bearings(grade 100). Standard finish - Bright zinc chromate. Take-A-Part only.

Size

- 12"(305mm) to 28" (711mm)

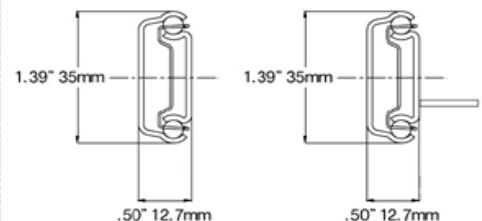

RECOMMENDED APPLICATIONS:
Desk box and economy file draws,
Store fixtures.

Slide Length (Inchs)	Slide Length ± 0.3mm	TRAVEL ± 1.5mm	S-203 SERIES HOLE POSITIONS(mm)							Load Rating (kg/pair)
			A	B	C	D	E	F	G	
12"	304.8	226.6	304.8	228.6	254.0	224.7	-	-	-	40.0
14"	355.6	264.7	355.6	279.4	304.8	275.5	-	-	-	38.0
16"	406.4	302.8	406.4	304.8	355.6	326.3	342.9	-	-	36.0
18"	457.2	340.9	457.2	330.2	406.4	377.1	393.7	-	-	34.0
20"	508.0	379.0	508.0	381.0	457.2	427.9	444.5	-	-	32.0
22"	558.0	416.5	558.0	406.4	508.0	478.7	495.3	-	-	30.0
24"	609.6	455.2	609.6	431.8	558.8	529.5	546.1	-	-	28.0
26"	660.4	493.3	660.7	482.6	609.6	580.3	596.9	-	-	26.0
28"	711.2	531.4	711.2	508.0	660.4	631.1	647.7	-	-	24.0